



VIS Housings

- high flow steam

- Specifically designed to maximise flow rates and minimise pressure drop
- Compatible with JUMBO element to maximise steam capacity



Specification

Materials of Construction

- Housing: 316L Stainless Steel
- Seals: EPDM

Surface Finish

- Internal: Inside of outlet and distribution box to be mechanically mirror polished 0.8 μm Ra. Immerse vessel to achieve 100% pickle and passivation.
- External: Grit blast 5 μm Ra mean

Maximum Allowable Working Pressure (MAWP) PS

7 barg (101.5 psig)

Maximum Allowable Working Temperature (MAWT) TS

170.5 °C (339 °F)

Design Code

Housings designed in accordance with the European Council Pressure Equipment Directive (PED) 97/23/EC and the UK statutory pressure equipment regulations (PER) 1999 N° 2001. PED / PER Conformity assessments based on Fluid Group 2 Gas (harmless) allowing for in-situ steam sterilisation. Only housings over PS.V 50 bar / litres bear the CE mark.



Design Basis

ASME VIII Division 1.

Physical Characteristics

Type	Dimensions (mm)			Typical Weight (Kg)
	'A'	'B'	'C'	
VISCE-01J-DD	300	763	310	30.0
VISCE-01J-ED	330	895	140	50.0
VISCE-3J-DD	515	1049	410	100.0
VISCE-3J-ED	700	1237	490	150.0

For the full range of dimensions and weights, please contact Parker domnick hunter.

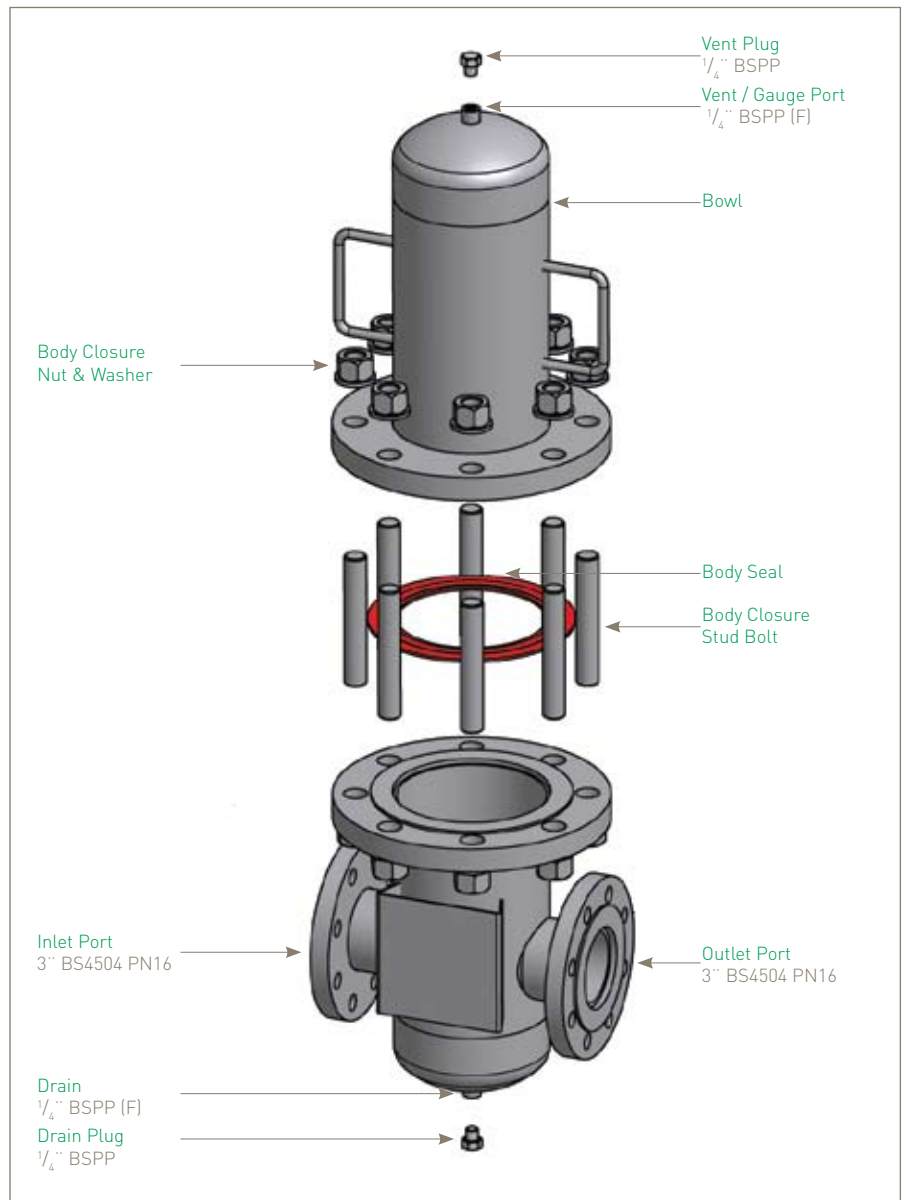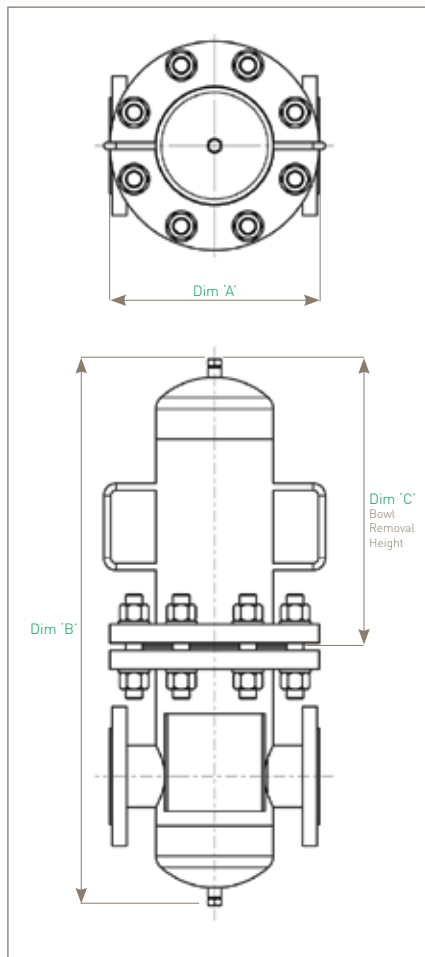

Ordering Information

VIS		-		-		
Code Vessel Class	Code N° of Cartridges	Code Length (Nominal)	Code Connection Size	Code Connection Type		
CE Standard	01 1 03 3	J Jumbo	D* 3" E* 4" G** 6" H** 8"	D BS4504 PN16 Flange A ANSI cl. 150 Flange		

* Single housings only
** Round housings only

Note: For accessories, i.e. gauges, please contact Parker domnick hunter - Process Division for full availability.

Parker domnick hunter has a continuous policy of product development and although the Company reserves the right to change specifications, it attempts to keep customers informed of any alterations. This publication is for general information only and customers are requested to contact our Process Filtration Sales Department for detailed information and advice on a products suitability for specific applications. All products are sold subject to the company's Standard conditions of sale.